Pre-calibrated AG-4 module

----Alphasense A series Oxygen Sensors Module

Features

- ✓ High performance
- ✓ Leak FREE
- ✓ Digital outputs: UART / TTL / RS232
- ✓ pre-calibrated before leaving the factory



Product Description

The AG-4 module uses Alphasense A-series electrochemical oxygen sensors for reliable, precalibrated oxygen concentration measurements. With a compact 20mm diameter, it fits well in portable gas detectors. Its high accuracy is essential for monitoring oxygen levels in safety, healthcare, air quality assessment, and industrial processes.

Technical Specification

Item	Specification	
Model Number	AG-4-O2-MA4S(D)	
Target Gases	Oxygen	
Sensing Principle	Electrochemical	
Detection Range	See corresponding sensor spec	
Resolution	See corresponding sensor spec	
Measurement Error	< ±5% FS	
Operating Voltage	3.2 – 5.5V DC	
Operating Current	≤ 500uA@5V	
Output Signal	UART (+3.0V TTL)	
Temperature Range	-20 - 55°C	
Humidity Range	0% -90%RH	
Pressure Range	1 ± 0.1 atm	
Storage Temperature	10 - 20°C	
Size	L*W*H=41mm*27mm*26mm	
Expected Life	See corresponding sensor spec	

深圳市新世联科技有限公司

地址:深圳市深南中路2066号华能大厦712室 邮编:518031

电话: 0755-83680810 83680820 83680830 83680860 传真: 0755-83680866


网址: www.apollounion.com 邮箱; sales@apollounion.com

Corresponding Sensor

Alphasense next-generation oxygen sensors — the leak-proof O2-A2/A3, industrial safety-focused LFO2-A1 (0-30% O_2), and ultra-precise LFO2-AH (0-2% O_2 with ppm-level detection)

Oxygen Sensor		
Sensor part number	Measuring range	Sensor spec
AG-4-O2-MO2A2(D)	0 ~25% vol O ₂	2-year life span ¹ t90: < 13(s) ²
AG-4-O2-MO2A3(D)	0 ~25% vol O ₂	3-year life span t90: < 13(s)
AG-4-O2-MLFA4(D)	0 ~30% vol O2	Lead-Free Operating life > 5 years Linearity < 0.1% deviation ³
AG-4-O2-MLFA1(D)	0 ~30% vol O ₂	Lead-Free
AG-4-O2-MLFAH(D)	0 ~2% vol O ₂	Operating life > 5 years ⁴
AG-4-O2-MLFAL(D)	0 ~95% vol O ₂	t90: < 10(s)

Alphasense oxygen sensors sensor delivers RoHS-compliant, lead-free durability, combining universal reliability with specialized performance for safety, process control, and critical low-concentration applications.

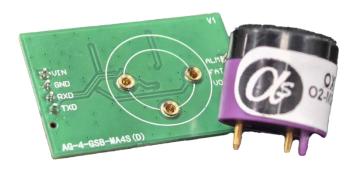

深圳市新世联科技有限公司

地址:深圳市深南中路2066号华能大厦712室 邮编:5

电话: 0755-83680810 83680820 83680830 83680860 网址: www.apollounion.com 邮编: 518031

传真: 0755-83680866 邮箱: sales@apollounion.com

¹ Years until 80% original output of 20.9% **O**₂

² Seconds from 20.9% to 0% **O**₂

³ At 10% O:

 $^{^4\,}$ Years until 85% original output of 20.9% \mbox{O}_{2}